
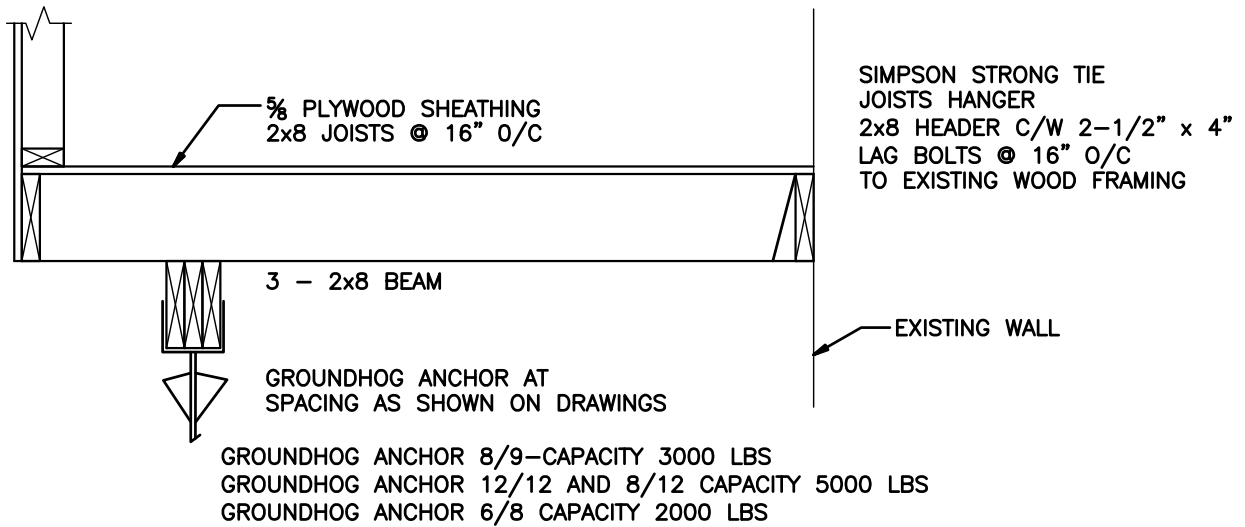


GROUNDHOG ANCHOR AND SUPPORT SYSTEMS			
RECOMMENDED DESIGN LOADS			
ANCHOR TYPE	SHAFT LENGTH	FLIGHT AUGER DIAM.	ALLOWABLE LOAD (LBS)
12/12	12'-0"	12"	5000
8/12	8'-0"	12"	5000
8/9	8'-0"	9"	3000
6/8	6'-0"	8"	2000

Notes:

- 1) Ultimate loads were based on a vertical applied load that created a 0.1 inch displacement. National Testing Laboratories Limited, report date June 07, 2010.
- 2) Safety factor applied to ultimate load=2.
- 3) Test soil type was firm to stiff clay – (1500 psf bearing capacity)
- 4) Loads values will have to be revised for different soil conditions.
Engineer to be contacted if site soil conditions are not firm to stiff clay.
Engineer shall be retained to calculate the loads being applied.
- 5) Site specific field modifications to be undertaken by registered installers of Groundhog Anchors only.

WOLFROM ENGINEERING LTD CONSULTING ENGINEERS 345 WARDLAW AVENUE WINNIPEG, CANADA R3L 0L5 (204)452-0041 FAX: 284-8680 E-Mail: info@wolfromeng.com	DATE	MAY 02, 2013	SEAL 
	SCALE	AS NOTED	
JOB TITLE	FILE NO.	W10233	
DESIGN CRITERIA GROUNDHOG ANCHOR AND SUPPORT SYSTEMS	DRAWING NO.	SK-1	THIS SEAL IS NOT VALID UNLESS SIGNED & DATED BY THE ENGINEER



General Notes:

This sketches and drawings are not site specific.
Soil conditions may vary from site to site. Building
authorities will require site specific drawings.
The Engineer has not been retained to provide drawings or supervision.

Design Loads

Roof: Snow Load = 26 psf
Dead Load = 8 psf

Floor: Live Load = 40 psf
Dead Load = 10 psf

All wood framing to be in accordance with CSA 086.
All timber to be #2 SPF or better.

GROUNDHOG ANCHOR TO BE INSTALLED IN FIRM TO STIFF CLAY OR DENSE SAND

<p>WOLFROM ENGINEERING LTD</p> <p>CONSULTING ENGINEERS 345 WARDLAW AVENUE WINNIPEG, CANADA R3L 0L5 (204)452-0041 FAX: 284-8680 E-Mail: info@wolfromeng.com</p>	<p>DATE</p> <p>MAY 02, 2013</p>	<p>SEAL</p>
	<p>SCALE</p> <p>AS NOTED</p>	
<p>JOB TITLE</p> <p>TYPICAL CROSS SECTION GROUNDHOG ANCHOR AND SUPPORT SYSTEMS</p>	<p>FILE NO.</p> <p>W10233</p> <p>DRAWING NO.</p> <p>SK-2</p>	

THIS SEAL IS NOT VALID UNLESS
SIGNED & DATED BY THE ENGINEER